


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Monsoon Column Shower Cold
Product code: MSHM100SS

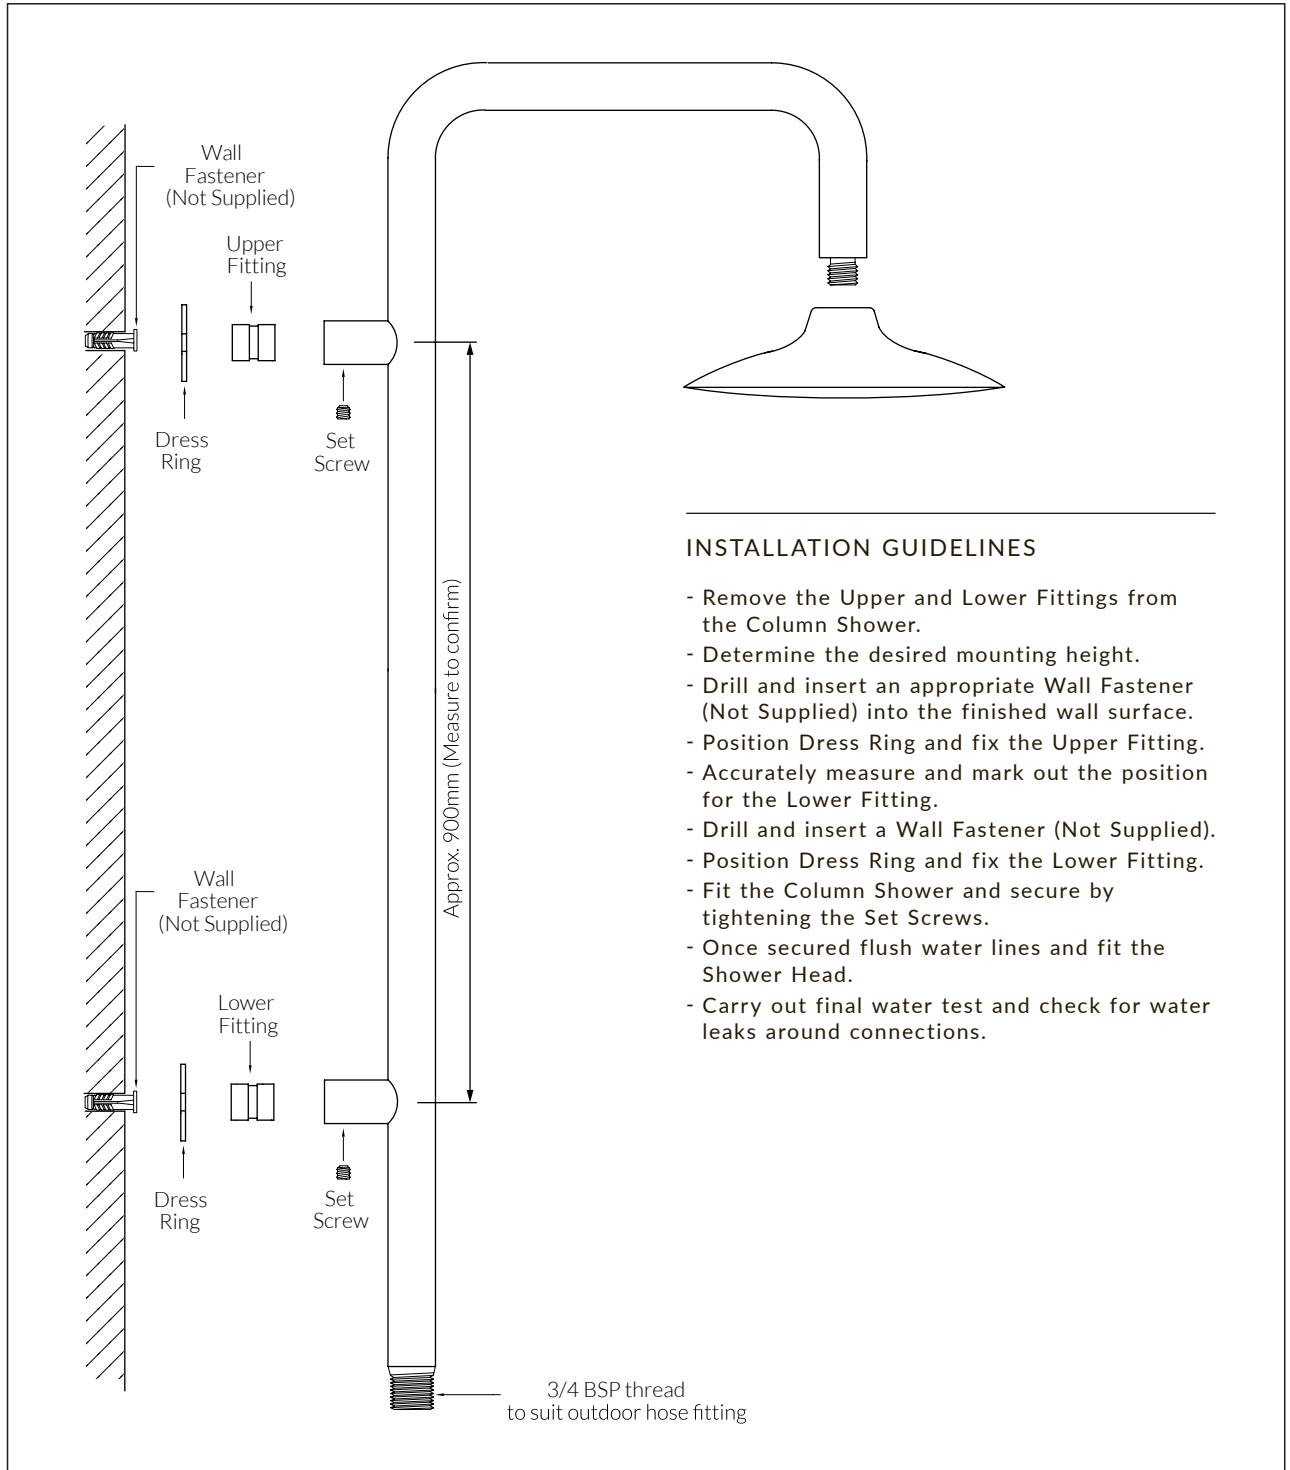

INSTALLATION GUIDELINES

- Remove the Upper and Lower Fittings from the Column Shower.
- Determine the desired mounting height.
- Drill and insert an appropriate Wall Fastener (Not Supplied) into the finished wall surface.
- Position Dress Ring and fix the Upper Fitting.
- Accurately measure and mark out the position for the Lower Fitting.
- Drill and insert a Wall Fastener (Not Supplied).
- Position Dress Ring and fix the Lower Fitting.
- Fit the Column Shower and secure by tightening the Set Screws.
- Once secured flush water lines and fit the Shower Head.
- Carry out final water test and check for water leaks around connections.