


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.  
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Monsoon Column Shower Hot/Cold  
Product code: MSHM500SS

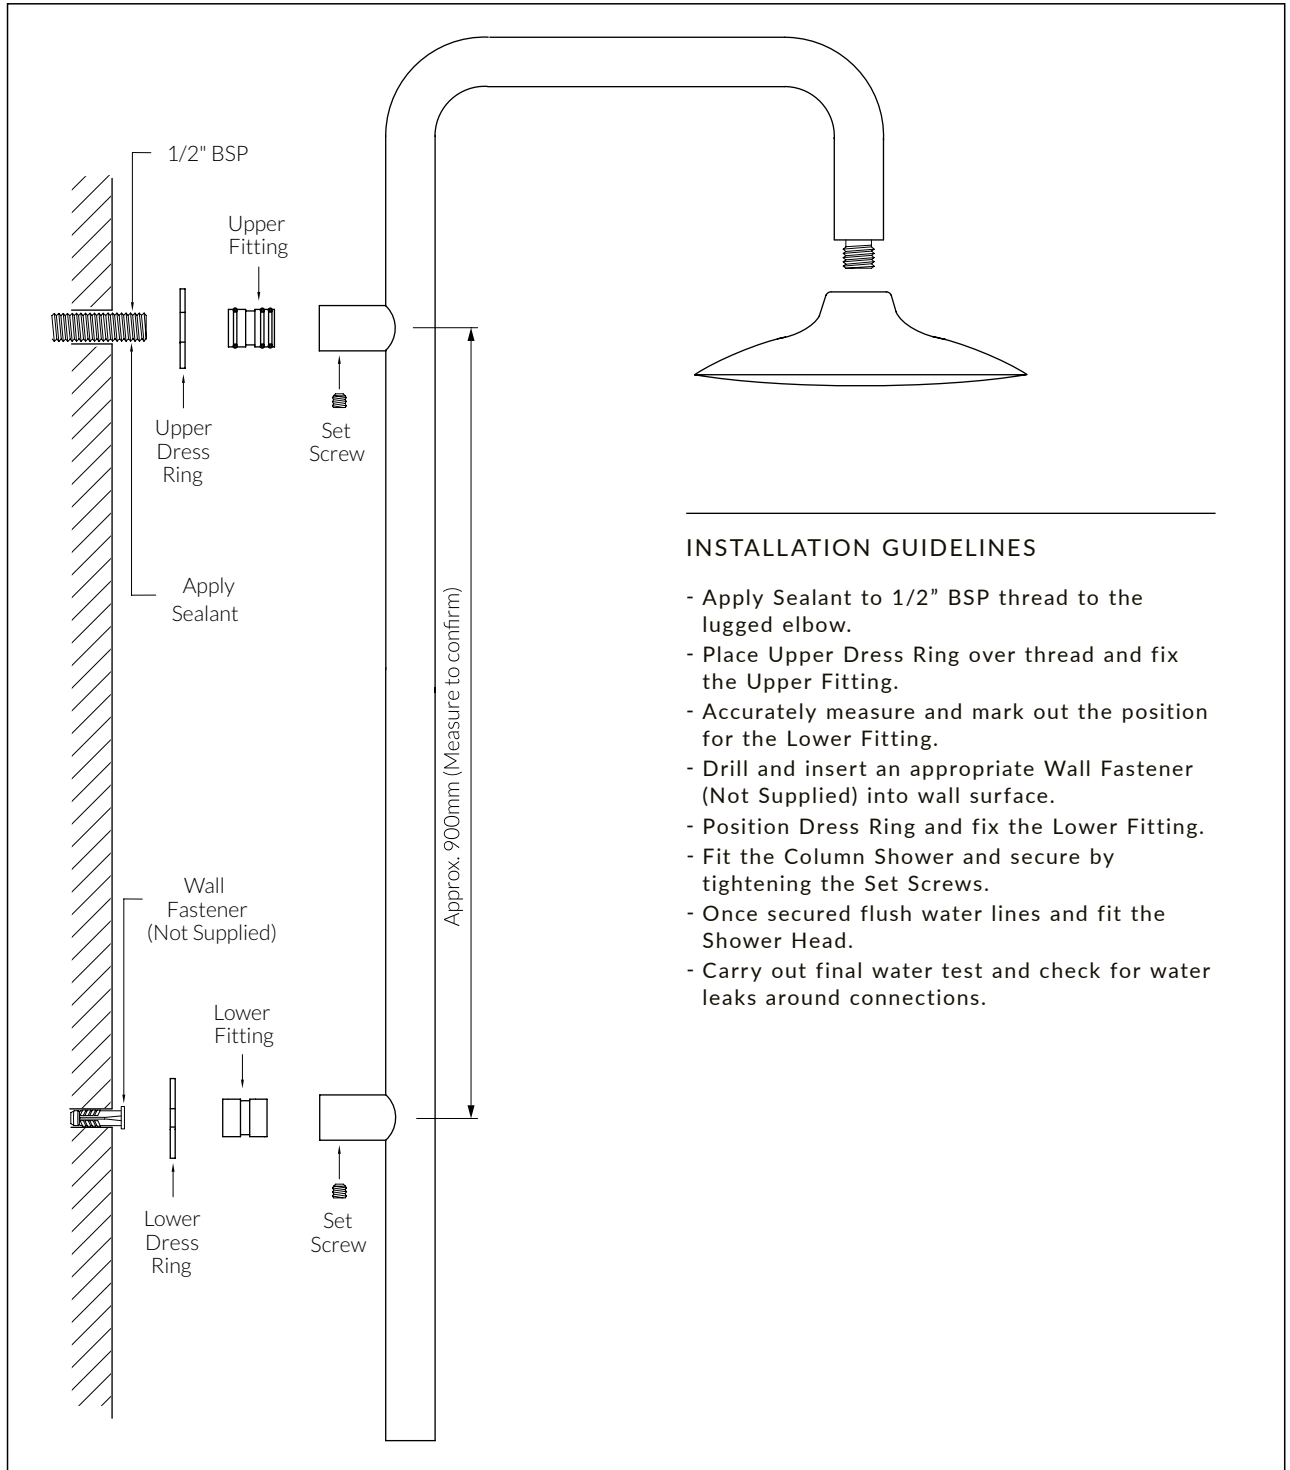

INSTALLATION GUIDELINES

- Apply Sealant to 1/2" BSP thread to the lugged elbow.
- Place Upper Dress Ring over thread and fix the Upper Fitting.
- Accurately measure and mark out the position for the Lower Fitting.
- Drill and insert an appropriate Wall Fastener (Not Supplied) into wall surface.
- Position Dress Ring and fix the Lower Fitting.
- Fit the Column Shower and secure by tightening the Set Screws.
- Once secured flush water lines and fit the Shower Head.
- Carry out final water test and check for water leaks around connections.