
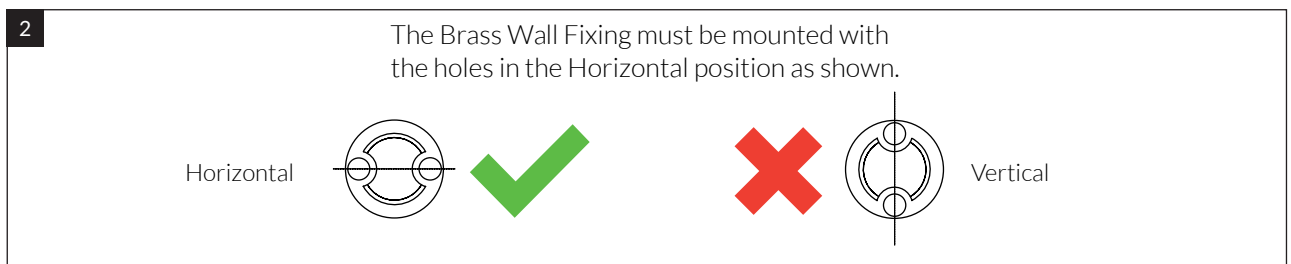


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Suba Guest Towel Rail 300mm
Product code: BGTR300

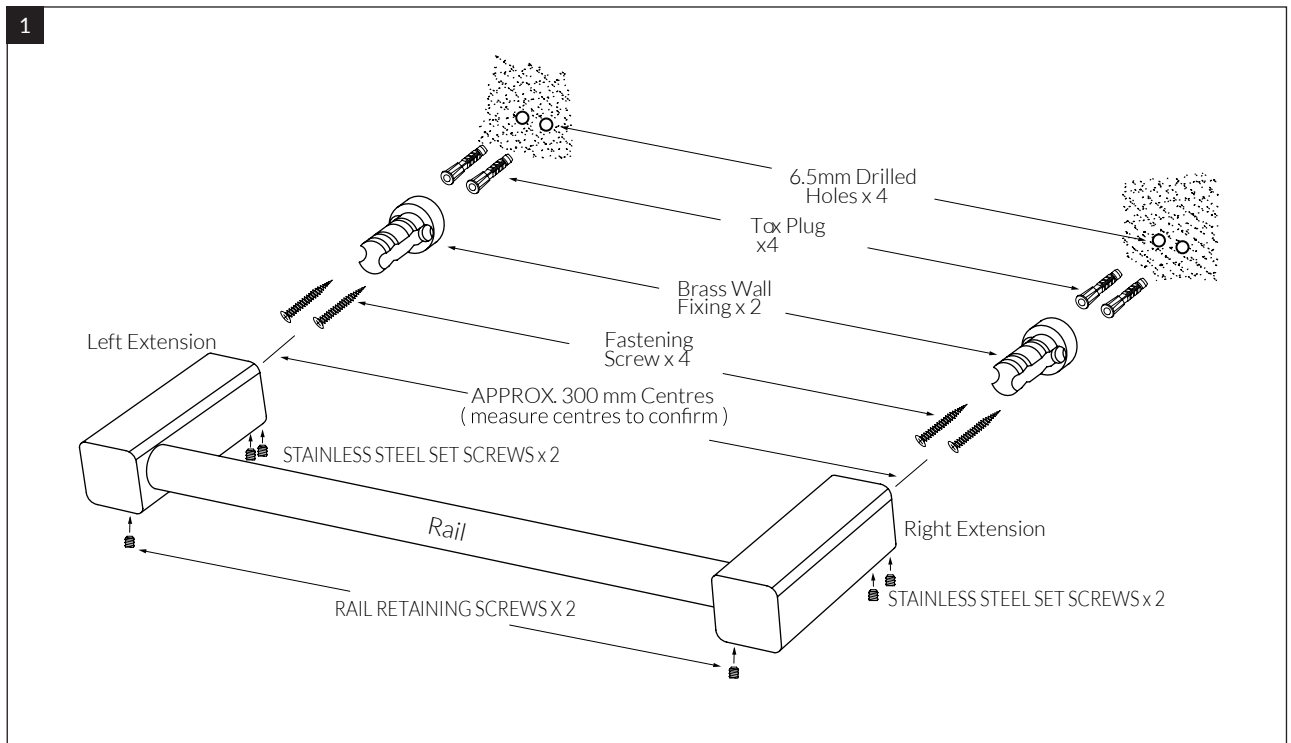

- Before installing ensure work area is clean and free of any obstacles.
- Carefully unpack to identify the parts and assemble on a non-scratch surface.
- Using the supplied 2mm Allen Key, loosen the Stainless Steel Set Screws within the Extensions and remove the Brass Wall Fixings.
- Combine the Rails with both Extensions and measure to confirm the exact centre distance between the Extensions.
- Choose the desired location for mounting and mark-out measured centres. Add 1 or 2 mm to ensure final fit of the Guest Towel Rail.
- Centralize the Brass Wall Fixings onto the marked-out positions and transfer drilling holes.

- NOTE:**
- The Brass Wall Fixings must be mounted with the Holes in the Horizontal direction. (see Fig.2)
 - Drill 6.5mm holes, fit Tox Plugs and secure the Brass Wall fixings using the Fastening Screws.
 - Fit the Guest Towel Rail over the Brass Wall Fixings as a combined assembly . (Rails with Extensions)
 - Ensure the Extensions are aligned square and tighten the Stainless Steel Set Screws.
 - To complete the installation tension the Rail retaining screws to fix the Rails.