Scala

Floormount mixer Fixing distances

SUSSEX

Product code

SFLM160T	Floormount mixer 160mm
SFLM200T	Floormount mixer 200mm
SFLM250T	Floormount mixer 250mm
SFMBMCT.01	Floormount basin mixer curved
SFMBMQT.01	Floormount basin mixer square
SFMCHT	Floormount mixer curved with hand shower
SFMQHT	Floormount mixer square with hand shower
SFMMCT	Floormount bath mixer curved
SFMMQT	Floormount basin mixer square

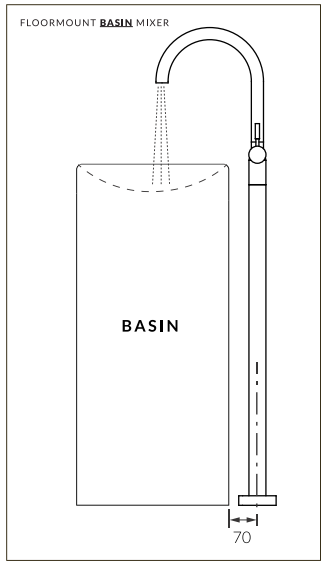

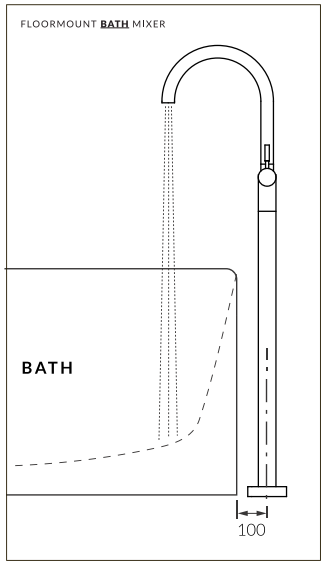

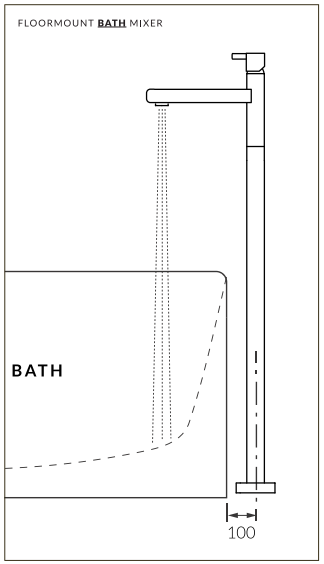

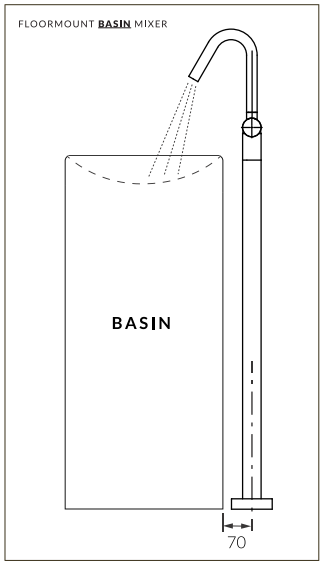

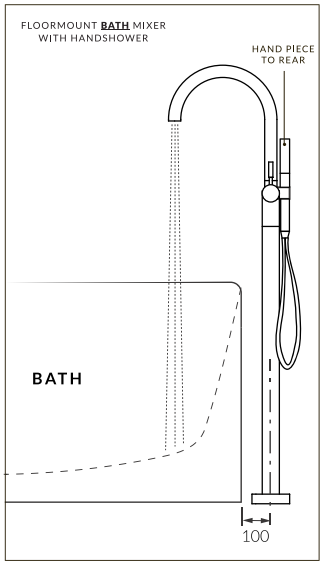

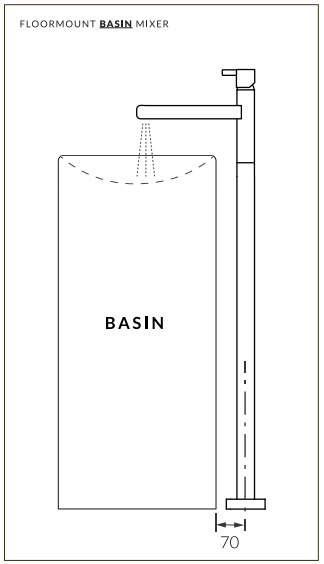

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

reece

www.reece.com.au

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.
Copyright © Sussex Taps.

Scala

Floormount mixer Wooden floor Rough-in

SUSSEX

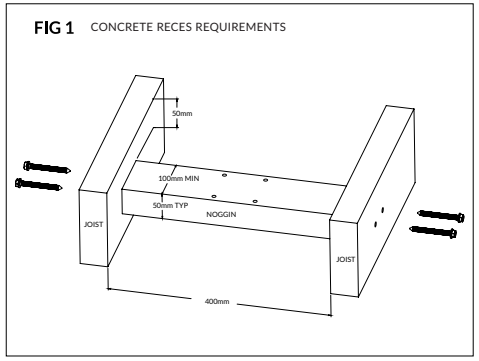

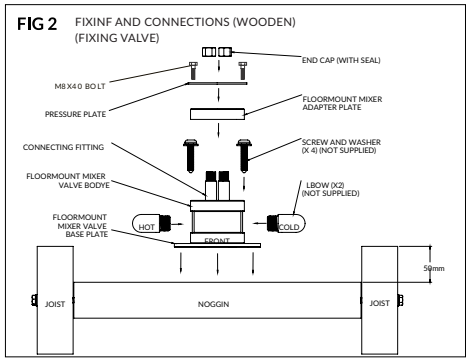

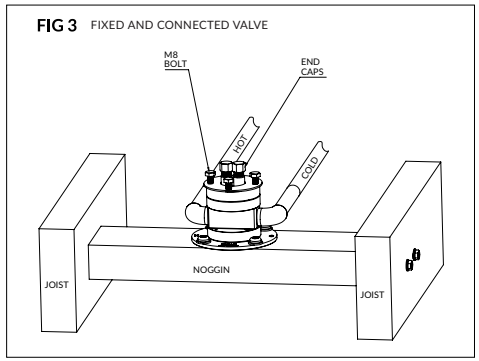

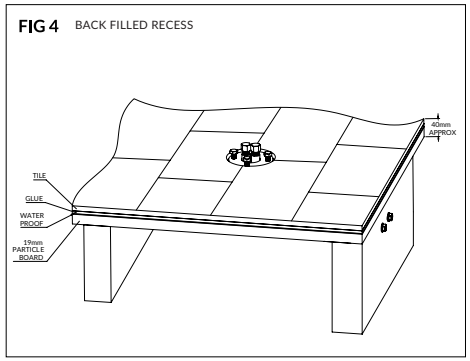

Rough-in (Wooden floor)

- Fix a 100x50mm min noggin. 50mm below the top of the joists in the position where the floormount mixer is to be located **(Fig. 1)**.

NOTE: the floormount mixer has been supplied to suit a concrete installation. Some parts need to be changed to suit a wooden floor.

- To suit wooden flooring, remove the m8x25mm bolts and the pressure plate. Using a 6mm allen key, remove the two connection fittings (O-ring sealed) and replace with the longer version (tighten well).
- Add the Floormount Mixer Adapted Plate. Replace the Pressure Plate and loosely fit the M8x40mm bolts **(Fig. 2)**.

NOTE: the shorter connection fittings and M8x25mm bolts will not be required.

- Add appropriate elbows or 1/2" BSP nipples to allow for hot/cold water connections (not supplied).
- Secure Floormount Mixer Valve to coggin using appropriate wood screws (not supplied).

NOTE: "FRONT" to face water vessel.

- Complete hot/cold water connections.
- Ensure the valve is level and well anchored.

Fixing and connections (Fig. 2 & 3)

- Connect 1/2" elbows (or male/female nipples) to Fixing Valve in preparation for the hot/cold water lines.
- Postion fixing valve into concreted recess area.

NOTE: Align "Front" to face bath or wash vessel.

- Mark and drill for 8mm "dyna bolt" or other appropriate anchoring bolts (not supplied).
- Fix Floormount Fixing Valve and complete hot and cold water line connections.
- Ensure the valve is level and well anchored.
- Tighten "end caps" and perform water testing, and ensure there are no water leaks.
- Leave end caps, pressure plate and fixing bolts in the valve to protect the threads until final fit-off.

Back-filled recess (Fig. 4)

- Once all water connections are made and tested, fill in the recessed area and channelling up to the Fixing Valve with a mortar mix.
- After mortar has set, seal the area between mortar and the Fixing Valve.

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.
Copyright © Sussex Taps.

reece

www.reece.com.au

Scala

Floormount mixer Concrete floor Rough-in

SUSSEX

FIG 1 CONCRETE RECES REQUIREMENTS

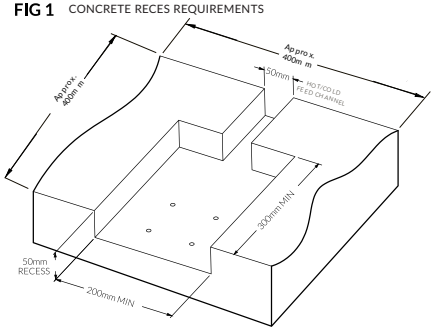

FIG 2 FIXINF AND CONNECTIONS (FIXING VALVE)

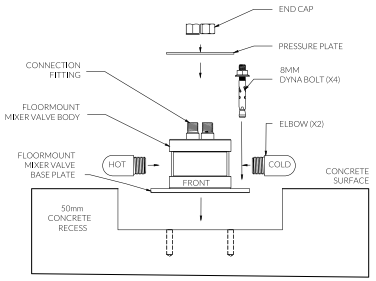

FIG 3 FIXED AND CONNECTED VALVE

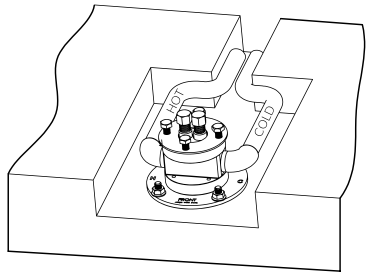

FIG 4 BACK FILLED RECESS

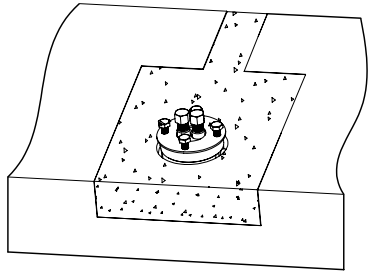

*To install this floormount fixing valve, a 50mm step down (recess) is required in the concrete slab. The floormount fixing valve is supplied with end caps, pressure plate and fixing bolts. Leave intact until final fit off with the floormount mixer.

New concrete floor (pre-pour)

*To install the Floormount Fixing Valve a 50mm step down (recess) is required in the concrete surface where the floormount is to be located.

- The recess area is to be a minimum of 200 x 300mm to allow enough room for the fixing valve to be fitted.

NOTE: This can be a larger area if unsure of exact mounting position.

Important: the recess area is required to be 50mm deep and must be flat and level.

Existing concrete floor

- Cut 400 x 400mm section through concrete slab where the floormount mixer is to be located **(Fig. 1)**.
- Remove cut section and drill for the appropriate concrete 'tie-rods' into side walls of cavity.
- Fit 'tie-rods' and pour concrete to create a 50mm step down (recess) from the original concrete floor surface **(Fig. 1)**.

NOTE: Recess area must be flat and level.

- Hot and cold lines can be chased into the recessed area by cutting a minimum 50 x 50mm channel **(Fig. 1)**.

Fixing and connections (Fig. 2 & 3)

- Connect 1/2" elbows (or male/female nipples) to Fixing Valve in preparation for the hot/cold water lines.
- Postion fixing valve into concreted recess area.

NOTE: Align "Front" to face bath or wash vessel.

- Mark and drill for 8mm "dyna bolt" or other appropriate anchoring bolts (not supplied).
- Fix Floormount Fixing Valve and complete hot and cold water line connections.
- Ensure the valve is level and well anchored.
- Tighten "end caps" and perform water testing, and ensure there are no water leaks.
- Leave end caps, pressure plate and fixing bolts in the valve to protect the threads until final fit-off.

Back-filled recess (Fig. 4)

- Once all water connections are made and tested, fill in the recessed area and channelling up to the Fixing Valve with a mortar mix.
- After mortar has set, seal the area between mortar and the Fixing Valve.

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.
Copyright © Sussex Taps.

Scala

Floormount mixer Wooden floor Fit off

SUSSEX

FIG 5

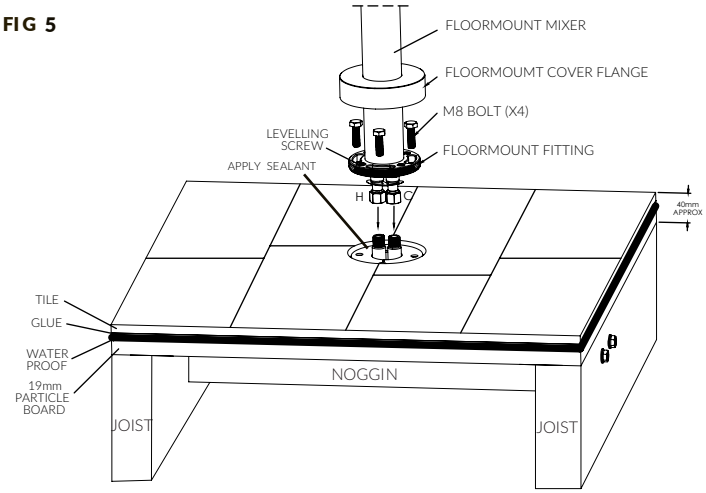

FIG 6

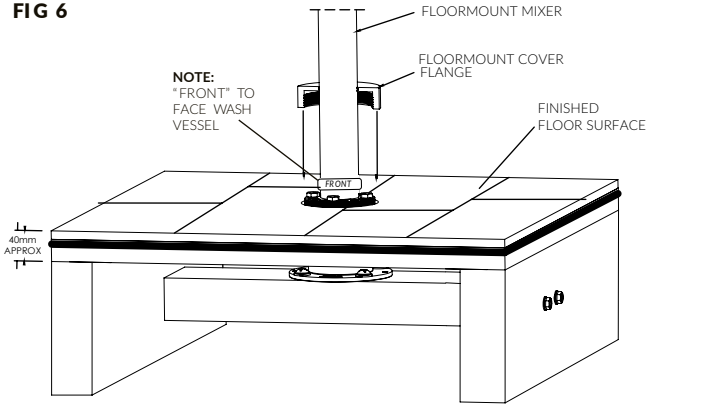

Fit-off (Wooden floor)

- Prior to installing, ensure floor around fixing valve is completely sealed.
- Raise the floormount cover flange.
- Remove "end caps" and retain if required.
- Connect hot and cold hoses from Floormount Mixer (a second person may be required to assist).

NOTE: the hose connection has a self sealing fitting. No sealant is required.

- Tighten the hex nuts of the hose fittings using an appropriate spanner (tighten well).
- Carefully lower the mixer to meet the pressure plate.

NOTE: "Front" of Floormount Mixer must face the bath or wash vessel.

- Align and fit supplied M8 bolts.
- Before fully tightening, allow water flow and check for water leaks.
- Tighten M8 bolts and check Floormount Mixer is level. If levelling is required, loosen M8 bolts and adjust levelling screws as required.
- To complete the installation, lower the cover flange until it meets the finished floor surface.
- Check mixer function and look for any leaks.

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.
Copyright © Sussex Taps.

Scala

Floormount mixer Concrete floor Fit off

SUSSEX

FIG 5

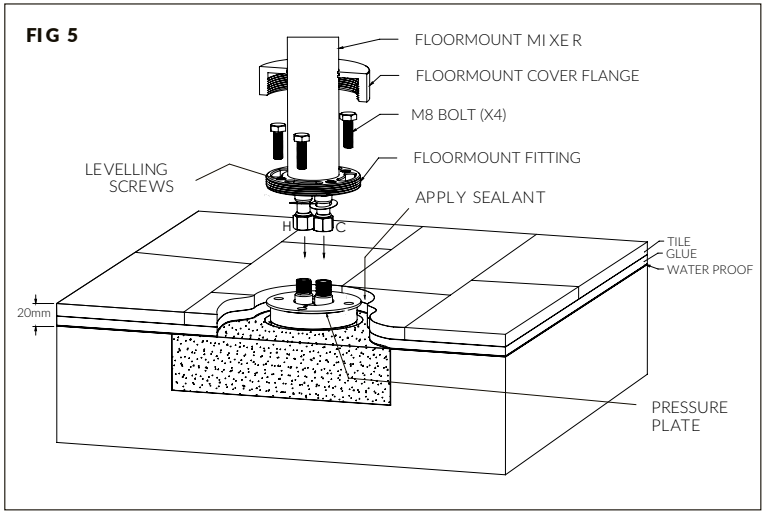

FIG 6

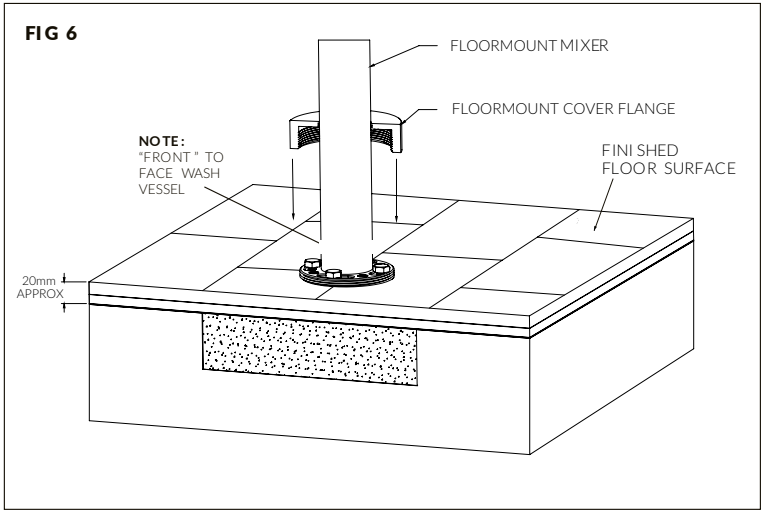

Fit-off (Concrete floor)

- Prior to installing, ensure floor around fixing valve is completely sealed.
- Raise the floormount cover flange.
- Remove “end caps” and retain if required.
- Connect hot and cold hoses from Floormount Mixer (a second person may be required to assist).

NOTE: the hose connection has a self sealing fitting. No sealant is required.

- Tighten the hex nuts of the hose fittings using an appropriate spanner (tighten well).
- Carefully lower the mixer to meet the pressure plate.

NOTE: “Front” of Floormount Mixer must face the bath or wash vessel.

- Align and fit supplied M8 bolts.
- Before fully tightening, allow water flow and check for water leaks.
- Tighten M8 bolts and check Floormount Mixer is level. If levelling is required, loosen M8 bolts and adjust levelling screws as required.
- To complete the installation, lower the cover flange until it meets the finished floor surface.
- Check mixer function and look for any leaks.

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

reece

www.reece.com.au

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.
Copyright © Sussex Taps.

Scala

Floormount mixer Installation kit Fit-off

SUSSEX

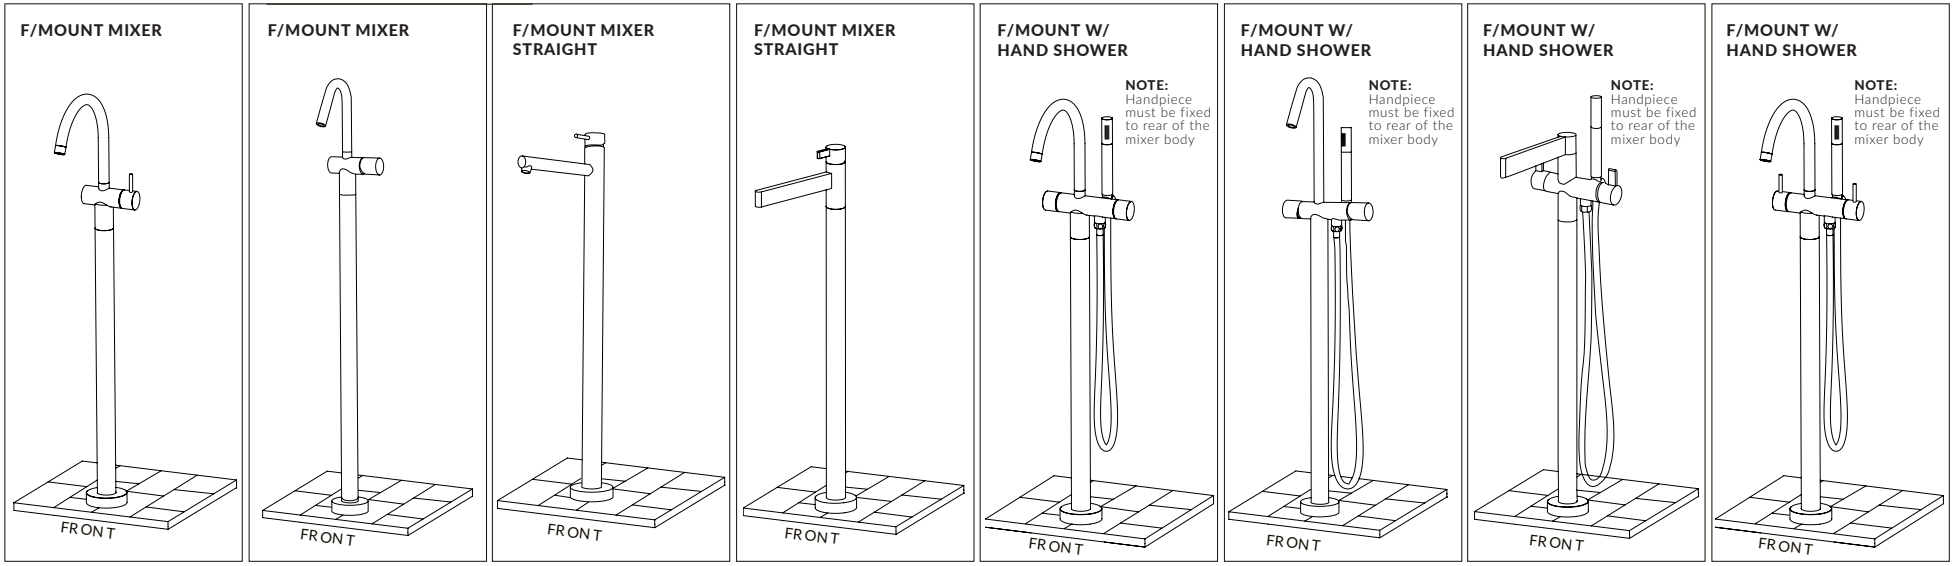

Lead Free
AS 3718
LIC. 20081

AS/NZS 3718:2005
LIC. 20081

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003
Recommended working water pressure 300-500 kpa. Maximum water temperature is 65 deg.c
This product complies with Lead Free requirements, where applicable.

reece

www.reece.com.au