


# Scala Medium basin mixer

# SUSSEX

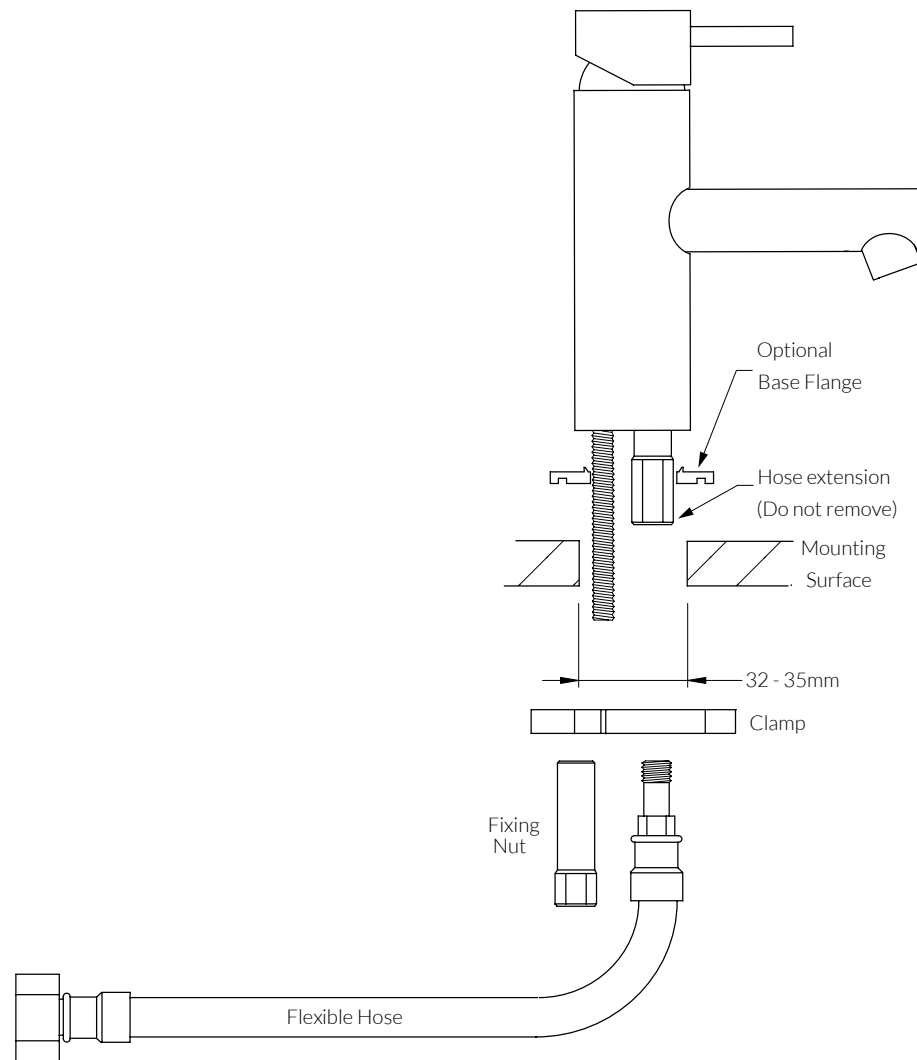

## Product code

SMBM	Medium basin mixer	SMBM100P	Medium basin mixer 100mm pin
SMBM130O	Medium basin mixer 130mm outlet	SMBM150P	Medium basin mixer with 150mm pin
SMBM150O	Medium basin mixer 150mm outlet		

## Installation guidelines

- The Mixer is supplied assembled, only the Fixing nut and the Brass Clamp need to be removed.
- Decide if the Optional Base Flange is to be used.
- If using the Optional Base Flange discard the smaller Base O Ring.
- Add the base Flange to base of Mixer and attach the Flexible Hoses to the Mixer Hose extensions.
- In some cases the Flexible Hoses may need to be fed through from under the mounting surface and then attach.
- Once the Flexible Hoses have been secured, lower the Mixer onto the mounting surface.
- Working from underneath the mounting surface fit Clamp and Fixing Nut.
- Before fully securing the Mixer ensure that the Base O Ring is intact and the Mixer is centered over the mounting surface hole.
- The Mixer mounting surface must be completely water-tight.
- Connect the Hot and Cold Flexible hoses to the corresponding 1/2" BSP water feed lines.
- The 1/2" connection of the Flexible hoses have a conical seal, ensure the mating threads are cut square and burr free.
- Isolating stop valves are recommended with all installations. (not supplied)
- Ensure all fittings and connections are water-tight.

**Note:** Optional Base Flange must be used when the clearance hole for mounting the Mixer exceeds 35mm. If the mounting hole clearance exceeds 45mm a custom made Base flange will be required.

## Plumber note

- On-site testing using higher water pressures must be conducted with the Mixer in the closed position. (STATIC TEST)
- Under no circumstances is the Mixer to be opened when exceeding the maximum stated water pressure.
- At the completion of testing, do not relieve any high water pressure by operating the Mixer.
- Exposing the internals of the Mixer Cartridge to higher than specified water pressures will void the manufacturers warranty.