


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.  
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Calibre Wall Top Assembly  
Product code: CWTA

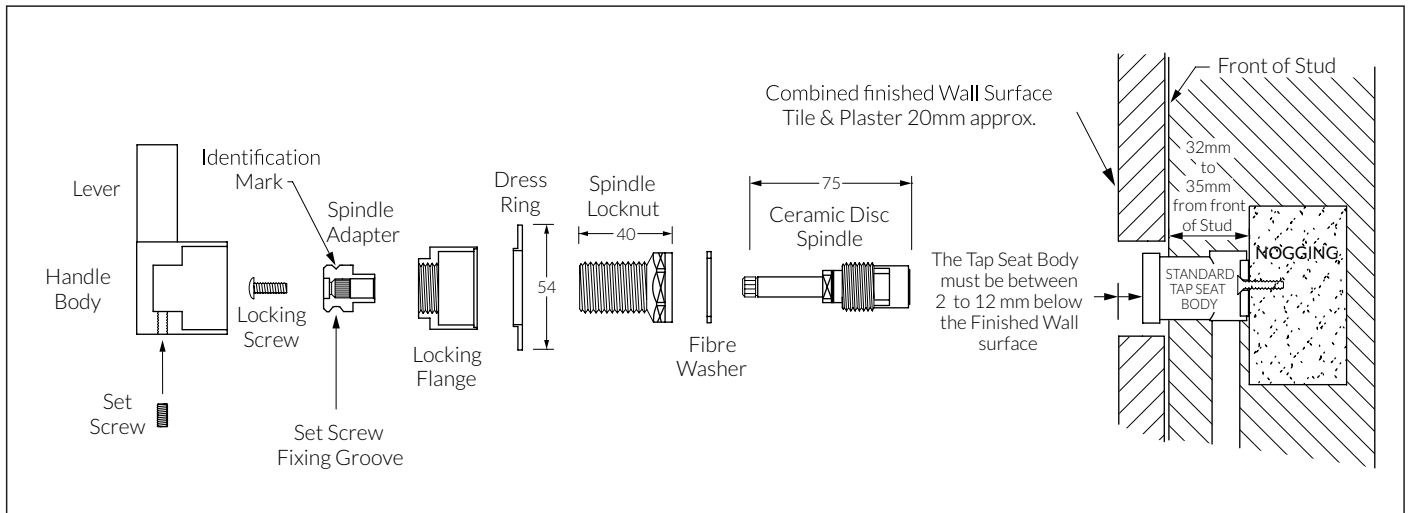

ROUGH IN (NEW WALL BREECH)

- A standard Wall Breech (not supplied) is to be used in conjunction with this Tapware.
- Prepare a nogging to be fitted 32 - 35mm back from the front of the stud for the fixing of the Wall Breech (as shown).
- When fixing the Breech to the nogging; ensure the Tap seats of the Breech will be level and square to the Finished Wall.
- To ensure the Tapware will fit correctly the thickness of the finished wall coverings must be calculated prior to "Rough In".
- When using thicker than normal wall covering, position the breech as forward as possible to ensure the Tapware will fit.

USING EXISTING BREECH (CHANGING TAPWARE ONLY)

- Remove the old Spindles and clean surrounding area.
- When installing new Spindles into old Breaching, it is highly recommended to use a re-seating tool to dress the Seat.
- Ensure the Spindle Seat is clean, flat and free of any debris.
- All lines must be completely flushed prior to fitting the Spindles.
- The distance from the finished Wall surface to the top of the Tap Seat must be between 2 to 12mm (See diagram)
- If the installation configuration is not with-in the dimensions as shown, alternative Spindles are available.

Longer Spindles can be ordered from original place of purchase. Sussex Part No. SXSPEK (12mm longer than standard)

**NOTE: Seat or Breech Body extensions are NOT to be used in conjunction with this Tapware. Failure to adhere will void warranty.**

ROUGH IN PLUMBING

- Upon receiving, carefully unpack the Tapware; note, some parts have been combined for packaging purposes.
- Separate parts as shown in diagram. The Spindles are supplied with Hot and Cold indications.
- Install the Spindles hand-tight until the seal of the Spindle makes contact with the seat.
- To ensure a good seal is made; tighten the Spindle slightly more using an appropriate spanner. Do not over-tighten.
- Note, over-tightening the Spindles could damage the ceramic discs and in turn, void the manufacturer's warranty.
- Place the Fibre washer over the seated Spindle and fit the Spindle Locknut. (Tighten well).
- Seal the wall around the Spindle, position the Dress ring and secure using the Locking Flange.
- Attach spindle adapter, ensure the identification mark is at the highest point when the spindle is in the off position.
- Secure the spindle adapter using the locking screw. (Tighten Well)
- Fit the handle body to the spindle, rotate handle until lever is in the vertical position (12 o'clock) and secure with the set screw.(Tighten Well)
- Note, Set Screw must enter fixing groove.
- After completing the installation, establish water supply, check function of Tapware and ensure no water leaks.